

Softening in steam boiler applications

Removing hardness minerals will provide optimum efficacy, efficiency and reduce operating costs.

By Mario C. Uy

Minerals such as calcium and magnesium that are found naturally in water are detrimental to certain applications like steam boilers since they will precipitate and deposit on heat transfer surfaces. Acting as an insulator, the deposit reduces heat transfer efficiency.

If the deposition is severe, it could cause the steam boiler to fail, shutting down the plant production or other similar consequences. Severe deposition has also been known to cause fire and boiler explosion.

The latter poses a liability issue and

an even great threat to the safety of the employees and the community. Insurance companies and local governments have been known to condemn boilers due to severe deposition.

In short, hardness minerals can cost dearly, so they should be mitigated. One mitigation method is via softening.

The best method is to remove most of the hardness mechanically, then to treat any residual hardness chemically.

Such a combination has proven to be the best mitigation method in terms of optimum efficacy, efficiency and operating cost.

Softener sizing

The most widely used mechanical softening equipment is a water softener. There are many factors to consider in choosing a softener, but the most important one is to specify the right size.

If the softener is undersized, the water flow will be restricted and the pressure after the softener will drop considerably.

If the softener is oversized, the water will only flow through a portion of the bed, causing a channeling effect. The resin in the water path will expire while the rest will be partially unused, resulting in short throughput, frequent regen-

Reach professionals in the water treatment industry

*Water Technology's
2005 Buyers Guide & Directory of Industry Suppliers
Listings must be renewed every year to be included!*

Add or Renew your listing by **December 1**
to be included in the print and online guide

visit www.watertechonline.com/buyerguideedit.asp
or call Katie Lilly at 518-783-1281, ext. 3155

Water 
TECHNOLOGY[®]

The Information Source for Water Treatment Professionals



Figure 1:
Efficiency loss from scale build-up

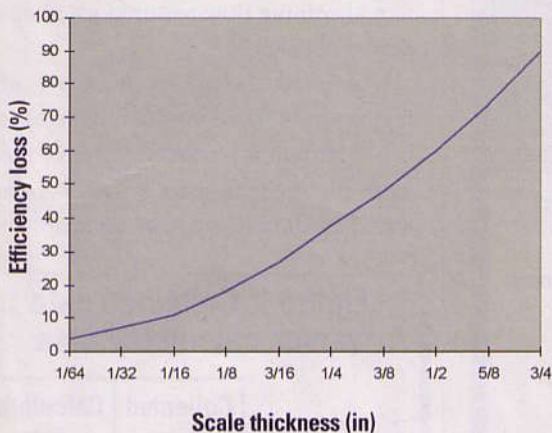


Figure 2: Single unit versus multiple unit softener

	Single unit	Multiple units
Supply of soft water	Supply of soft water is disrupted during regeneration	Continuous, uninterrupted supply of soft water
Peak flow	Requires a larger unit to meet peak flow	Smaller units can be combined to meet peak demand
Service disruption during repair	Supply of soft water is disrupted during repair	When only one unit is down, the remaining unit(s) can still supply soft water
Variable flow	Can handle a narrow range of flow rate	Can handle a wider range of flow rate; some units can be placed on stand-by during low flow and be placed back in service during high flow

eration, possible hardness leakage and excessive salt usage.

More choices

Other factors to consider in choosing a softener are:

- Single unit or multiple units
- Time or volume initiated regeneration

A design plan

Designing the right softener for a steam boiler application should start with a plant survey, collecting data such as water usage, flow rates and hours of operation, etc. However, some of this data may not be available, so they need to be derived by calculations.

See Figure 3 (page 60) for a sample exercise showing how to do so, for a 200 horsepower (Hp) steam boiler, running at 80 percent load, 24 hours a day, 80 percent condensate return, assuming an even and consistent flow rate and using make-up water with 9 grains per gallons of hardness.

Behind the calculations

Below are the bases, formulas and rules of thumb used for the above calculations.

- 1 boiler Hp = 34.5 lbs steam/hr
- Steam rate = Boiler Hp x 34.5
- 1 gal = 8.33 lbs
- Feedwater rate = Steam rate x (cycles/(cycles-1))
- Blowdown rate = Steam

rate/(cycles-1)

- Make-up rate = Steam loss rate + blowdown rate
- 1 ft³ of resin => 30,000 grain hardness @15 lbs salt/ft³

- 1 ft³ of resin => 25,000 grain hardness @10 lbs salt/ft³

- 1 ft³ of resin => 20,000 grain hardness @5 lbs salt/ft³

(Continued on next page)



tel: 800.543.5843
fax: 860.667.6549
e-mail: shelco@shelco.com
www.shelco.com

SHELCO FILTERS
697 Cedar Street, Newington, CT 06111, USA

call for a free catalog

Circle Product Information no. 246 on page 66

Mobile and Route Software For Water Treatment

"Up A Notch!"

MiniMate Plus



COMPLETE FEATURE SET AT
www.primvs.com/features.htm

Features "In The Office"

- Regular & Emergency Schedules
- Dispatch
- Survey Development
Water Tests / Check Lists / Prospecting / Quality Insurance
- Route Optimization

Features "On The Road"

- Palm Powered PDA
Quotes / Orders / Invoices / Surveys
- Water Testing
- Signature Capture
- Invoice Printing

516.944.5920



www.primvs.com

Circle Product Information no. 240 on page 66

(Continued from prior page)

- Minimum flow required => 0.5 gpm per ft³ of resin
- Maximum flow required => 10 gpm per ft³ of resin

(As water boils, its minerals are increasingly concentrated. Cycles of concentration is a measurement of how many times the minerals have concentrated in the boiler water compared to

Figure 3: Collected data versus calculated data

	Collected data	Calculated data
Hp design	200	
% load	80%	
Hp actual		160
Steam rate, actual, lbs/hr		5,520
% condensate return	80%	
Steam loss rate, lbs/hr		1,104
Cycles	10	
Feedwater rate, lbs/hr		6,133
Blowdown rate, lbs/hr		613
Make-up rate, lbs/hr		1,717
Make-up rate, gal/hr		206
Make-up rate, gal/day		4,944
Make-up rate, gpm		3.43
Hardness level, gpg	9	
Hardness level, gpd		44,496
Resin, ft ³ (1 regeneration/day @10 lbs salt/ft ³) (or 2 ft ³)		1.78


ISO 9002 Certified

Premier Water Testing Instruments

TDS METER 4





HOW PURE IS YOUR WATER?

DM2: DUAL TDS METER



Pure and simple. That's all water should be.

With HM Digital's line of water quality testing instruments, including our handheld and in-line TDS meters, as well as our single or dual line TDS & conductivity controllers, you'll be sure that your water is exactly as it should be - pure.

So when monitoring the performance of your filters and membranes is as important as who's drinking the water, trust the company that backs every one of its products with a three-year warranty.

PS202: DUAL TDS CONTROLLER



The best products for the best water. HM Digital.

HM Digital, Inc.
5819 Uplander Way
Culver City CA 90230
Tel: 310-410-3100
Fax: 310-410-3106
info@hmdigital.com
www.tdsmeter.com

Circle Product Information no. 223 on page 66

